


GENERAL NOTES:

- 1) SIGNAGE POSTS AND SUPPORT SHALL BE IN COMPLIANCE WITH FDOT STANDARD 11865 AND MIAMI-DADE COUNTY AND CITY OF CORAL GABLES PUBLIC WORKS DEPARTMENTS.
- 2) ALL SIGNS SHALL BE ERECTED IN ACCORDANCE WITH INDEX No. 17302.
- 3) ALL SIGNAGE AND MARKINGS SHALL CONFORM TO THE REQUIREMENTS OF MIAMI-DADE COUNTY FLORIDA.
- 4) ALL PAINT SHALL REFLECTIVE THERMOPLASTIC PAINT AS PER FDOT REQUIREMENTS.
- 5) SCHOOL SIGNS & MARKINGS SHALL BE IN COMPLIANCE WITH FDOT INDEX 17344 AND AS PER MIAMI-DADE COUNTY AND CITY OF CORAL GABLES PUBLIC WORKS

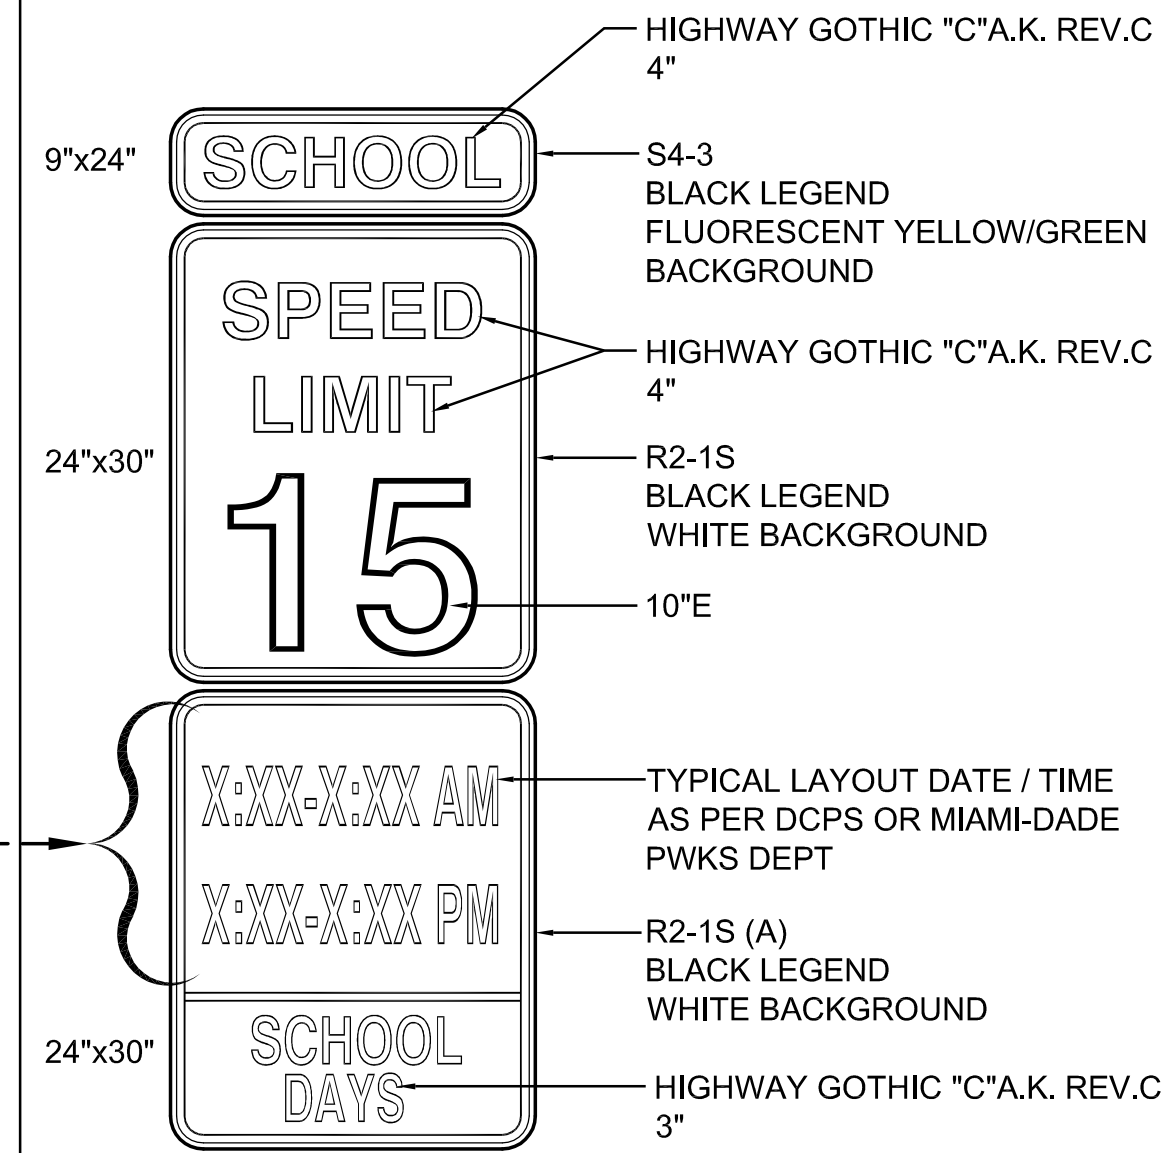


R2-1S SIGNAGE NOTES:

- 1) PROVIDE R2-1S SIGNAGE ASSEMBLY WITH (2) TWO SUPPORT POSTS.
- 2) ALL SIGNAGE SIZES, METAL THICKNESS, NOMENCLATURE, AND FONT SIZE & TYPE SHALL COMPLY WITH THE REQUIREMENTS OF MIAMI-DADE COUNTY PUBLIC WORKS DEPARTMENT-TRAFFIC DIVISION AND MUTCD STANDARDS.
- 3) ALL SIGNAGE PAINT, CONTRAST, AND REFLECTIVITY SHALL COMPLY WITH THE REQUIREMENTS OF MIAMI-DADE COUNTY PUBLIC WORKS DEPARTMENT-TRAFFIC DIVISION.
- 4) CONTRACTOR TO PROVIDE SIGNAGE SAMPLE PRIOR TO INSTALLATION.
- 5) CONTRACTOR SHALL MATCH SIGNAGE WITH SIGNALIZATION PLATES. PLEASE CONTACT MR. JOHN ORUE AT MIAMI-DADE PUBLIC WORKS FOR STARTUP MEETING PRIOR TO THE ORDERING OF ANY SIGNAGE.

No.	DATE	REVISION	BY
△	06.01.10	COORDINATION	IAF
△	07.22.11	COORDINATION	IAF

DRAWN BY:	APPROVED BY:
DATE:	SCALE:
2009	As Shown

KEY PLAN
 N.T.S.

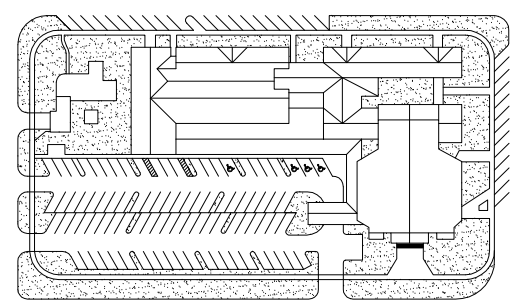

SEAL/SIGNATURE

10-05-2011

ROLANDO LLANES, AIA
 AR - 0013160

This drawing is the property of CIVICA and is not to be reproduced or copied in whole or part. It is not to be used on any other project and is to be returned on request.


COPYRIGHT © 2011

SHEET TITLE


PROPOSED
 SCHOOL
 SPEED ZONE
 SIGNAGE

SHEET NUMBER

T-3

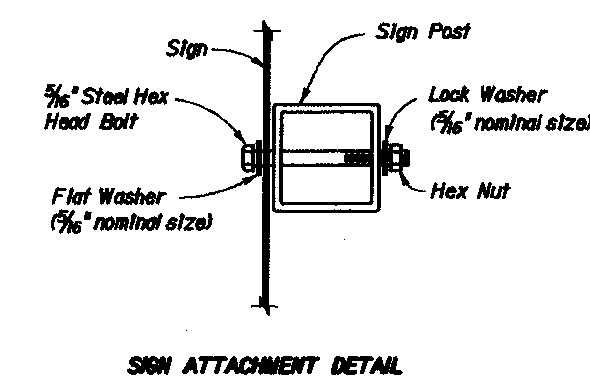


SIGN ATTACHMENT DETAIL

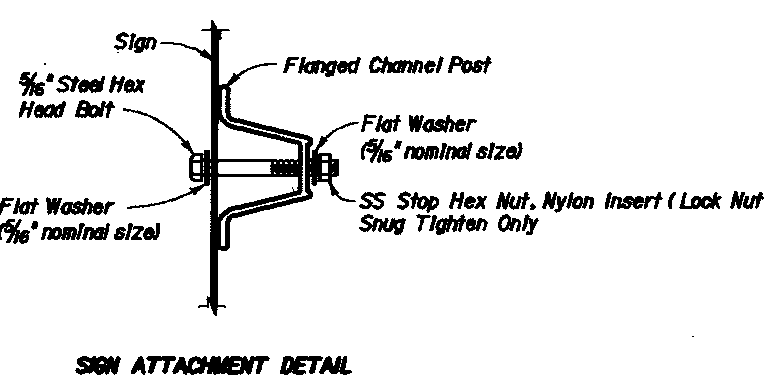


SIGN ATTACHMENT DETAIL

IN/PP*	Type	A (in.)	B (in.)	C (in.)	Sx (in ³)
2.50	F	1.562	3.125	1.250	.310
2.50	M	1.500	3.063	1.281	.313
3.00	F	1.750	3.500	1.625	.430
3.00	M	1.875	3.500	1.313	.447
4.00	F	1.750	3.500	1.621	.560
4.00	M	1.938	3.500	1.313	.625


* ± 4 %

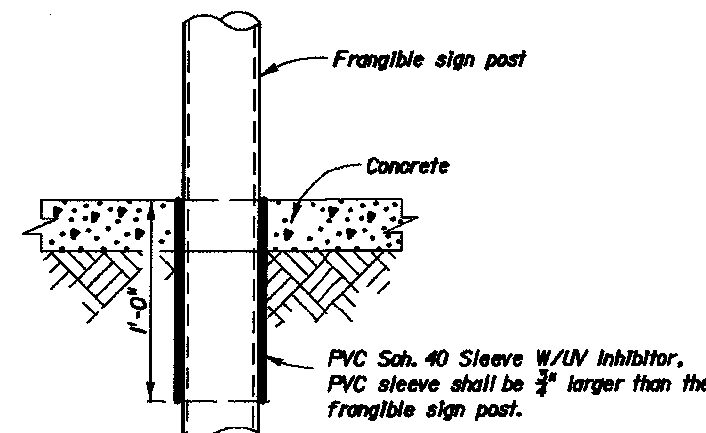


SIGN POST IN CONCRETE
 (CROSSOVERS, MEDIANS, & SIDEWALKS)

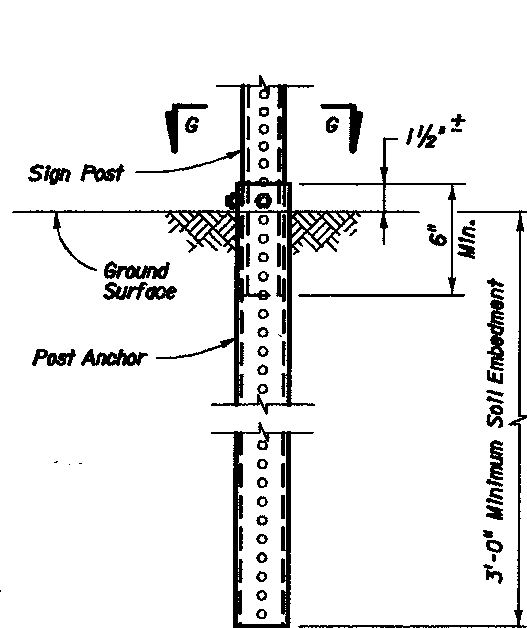


ELEVATION
 Showing Mounting Using Optional Anchor Tube

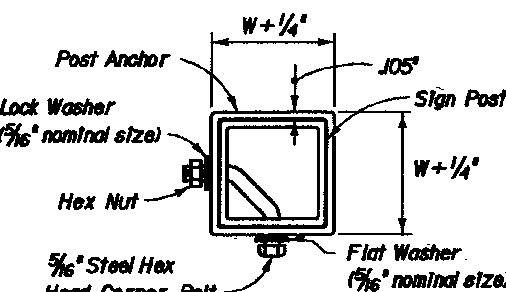


SECTION G-G

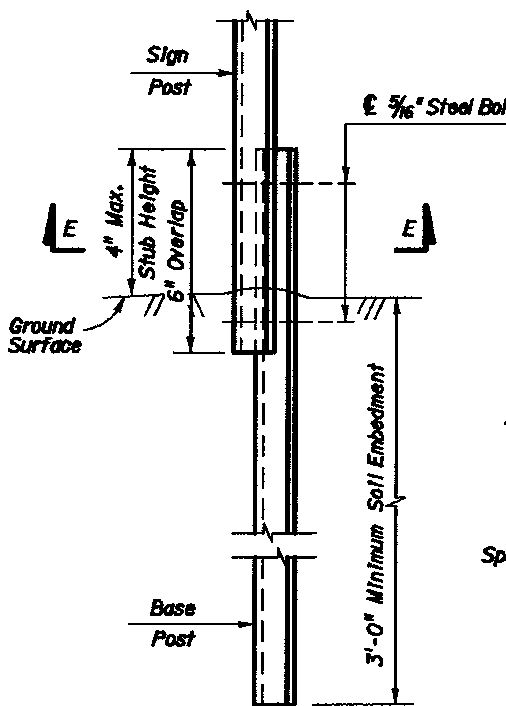


DETAIL "C"
 (Approved Frangible Installation)

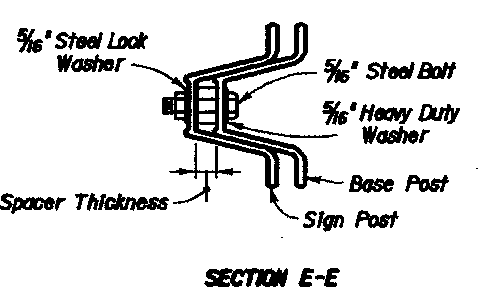


SECTION E-E
 Spacer Thickness shall be as follows:
 2.5 lb/ft Type M posts shall use 3/8" spacer.
 Other posts shall use 1/2" spacer (or two 3/8").

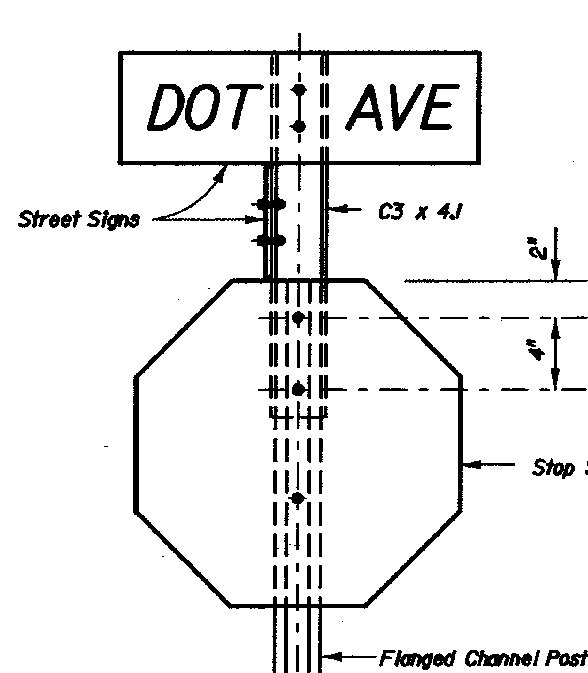


PERPENDICULAR SIGN ATTACHMENT DETAIL
 NOTE: All dimensions are in inches, unless otherwise noted.

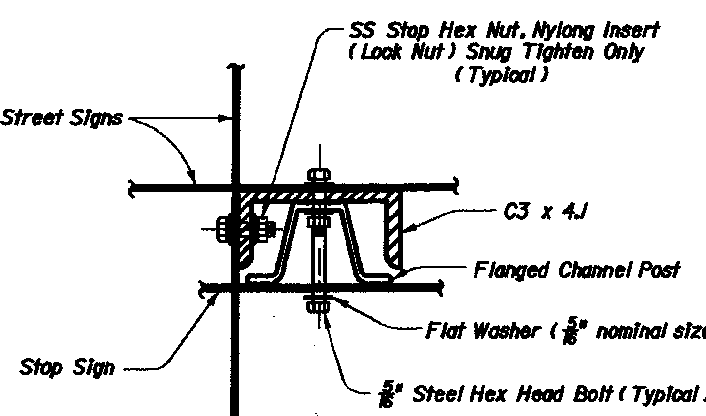


TOP VIEW

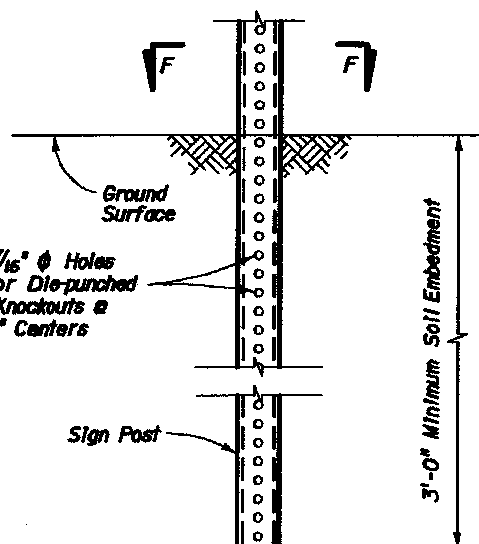


ELEVATION
 Showing Mounting Without Anchor Tube



SECTION F-F

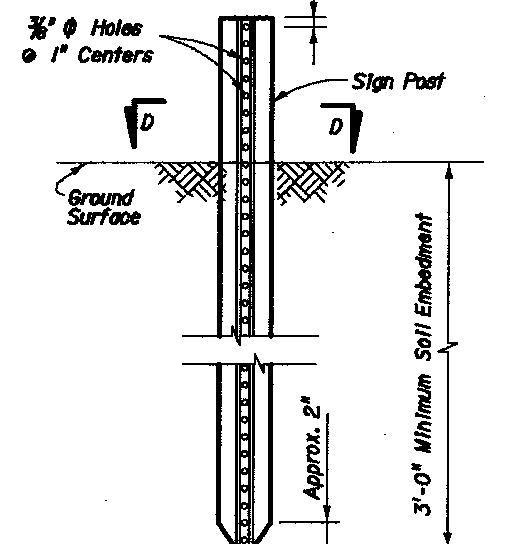

ELEVATION

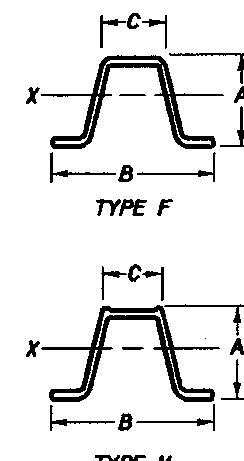

SECTION D-D

STEEL FLANGED CHANNEL POST DETAILS

STEEL SQUARE TUBE POST DETAILS